
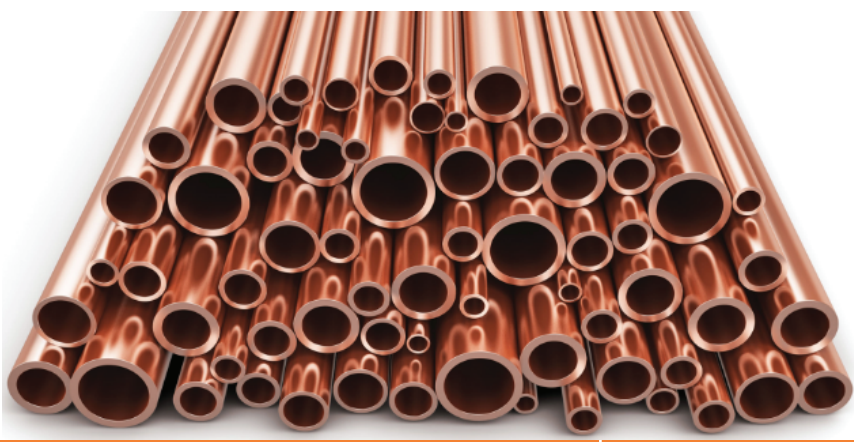


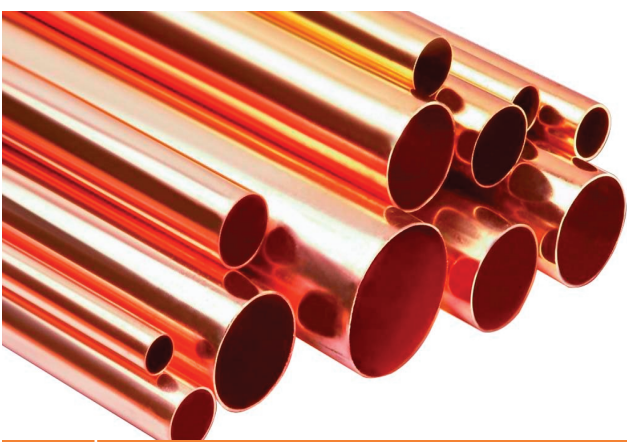

COPPER PIPE TYPE L	RATED INTERNAL WORKING PRESSURE PSIG									PRICE (PC)
	SIZE ขนาด		WT./INCH ความหนา นิ้ว	WT./mm. ความหนา มม.	WT./kg. น้ำหนัก กก.	ทนความร้อน				ราคา (เส้น)
	I.D.	O.D. mm.				150 F	200 F	714 F	400 F	
	1/4"	3/8"	9.52	0.030	0.76	1.09	775	729	714	456
3/8"	1/2"	12.70	0.035	0.89	1.70	662	623	610	389	1,000
1/2"	5/8"	15.87	0.040	1.02	2.50	613	577	565	361	1,436
5/8"	3/4"	19.05	0.042	1.07	3.10	537	505	495	316	1,772
3/4"	7/8"	22.22	0.045	1.14	3.90	495	466	456	291	2,316
1"	1-1/8"	28.57	0.055	1.27	5.70	420	395	387	247	3,200
1-1/4"	1-3/8"	34.92	0.060	1.40	7.70	373	351	344	219	4,,516
1-1/2"	1-5/8"	41.27	0.070	1.52	9.90	347	327	320	204	5772
2"	2-1/8"	53.97	0.080	1.78	15.00	309	291	285	182	8,632
2-1/2"	2-5/8"	66.67	0.090	2.03	21.40	285	269	263	168	13,080
3"	3-1/8"	79.37	0.100	2.28	28.80	270	254	248	159	17,160
3-1/2"	3-5/8"	92.07	0.110	2.54	37.00	258	243	238	152	22,800
4"	4-1/8"	104.77	0.142	2.79	46.00	249	235	230	147	28,800
6"	6-1/8"	155.57	155.57	3.56	88.00	213	201	196	125	72,056
8"	8-1/8"		-	5.08	171.53	230	216	212	135	โทร

COPPER PIPE TYPE M	RATED INTERNAL WORKING PRESSURE PSIG									PRICE (PC)
	SIZE ขนาด		WT./INCH ความหนา นิ้ว	WT./mm. ความหนา มม.	WT./kg. น้ำหนัก กก.	ทนความร้อน				ราคา (เส้น)
	I.D.	O.D. mm.				150 F	200 F	300 F	400 F	
1/4"	3/8"	9.52	0.022	0.64	0.90	-	-	-	-	400
3/8"	1/2"	12.70	0.025	0.64	1.28	485	456	447	285	572
1/2"	5/8"	15.87	0.028	0.71	1.65	420	395	387	247	832
5/8"	3/4"	19.05	0.030	0.76	2.20	-	-	-	-	888
3/4"	7/8"	22.22	0.032	0.81	2.75	346	326	319	204	1,316
1"	1-1/8"	28.57	0.035	0.89	3.84	286	270	264	169	1,888
1-1/4"	1-3/8"	34.92	0.042	1.07	5.67	287	271	265	169	3,488
1-1/2"	1-5/8"	41.27	0.050	1.24	7.87	282	265	259	166	4,800
2"	2-1/8"	53.97	0.060	1.47	12.08	254	239	234	149	7,488
2-1/2"	2-5/8"	66.67	0.070	1.65	16.84	233	219	215	137	10,920
3"	3-1/8"	79.37	0.080	1.83	22.33	215	203	199	127	15,040
3-1/2"	3-5/8"	92.07	-	-	-	214	202	197	126	—
4"	4-1/8"	104.77	-	-	-	213	201	197	126	—
6"	6-1/8"	155.57	-	-	-	186	175	171	109	—
8"	8-1/8"		-	-	-	195	183	180	115	—

COPPER PIPE TYPE K	RATED INTERNAL WORKING PRESSURE PSIG									PRICE (PC)
	SIZE ขนาด		WT./INCH ความหนา นิ้ว	WT./mm. ความหนา มม.	WT./kg. น้ำหนัก กก.	ทนความร้อน				ราคา (เส้น)
	I.D.	O.D. mm.				150 F	200 F	300 F	400 F	
	1/4"	3/8"	9.52	0.035	0.89	1.28	-	-	-	-
3/8"	1/2"	12.70	0.049	1.24	2.20	485	456	447	285	1,560
1/2"	5/8"	15.87	0.049	1.24	2.93	420	395	387	247	1,912
5/8"	3/4"	19.05	0.049	1.24	3.48	-	-	-	-	2,832
3/4"	7/8"	22.22	0.065	1.65	5.31	346	326	319	204	3,532
1"	1-1/8"	28.57	0.065	1.65	6.95	286	270	264	169	4,672
1-1/4"	1-3/8"	34.92	0.065	1.65	8.60	287	271	265	169	6,356
1-1/2"	1-5/8"	41.27	0.072	1.83	11.35	282	265	259	166	8,152
2"	2-1/8"	53.97	0.083	2.11	17.02	254	239	234	149	12,240
2-1/2"	2-5/8"	66.67	0.095	2.41	24.34	233	219	215	137	20,088
3"	3-1/8"	79.37	0.190	2.77	33.12	215	203	199	127	29,460
3-1/2"	3-5/8"	92.07	-	-	-	214	202	197	126	—
4"	4-1/8"	104.77	0.134	3.40	53.99	213	201	197	126	51,732
6"	6-1/8"	155.57	-	-	-	186	175	171	109	—
8"	8-1/8"		-	-	-	195	183	180	115	—